

## **IMPROVED DESIGN**



REMOVE <u>HEAVY DEAD PIGS</u> BY YOURSELF, EFFORTLESSLY, AND IN TOTAL <u>SAFETY</u>!






## SOPHISTICATED CONTROL SYSTEM

Accessible control buttons

Forward/backward switch

Main power key switch

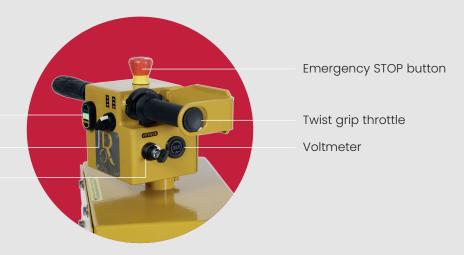

## **SPECIFICATIONS**

## GENERAL

Speed control Variable speed with twist grip throttle  Drive motor 24V, 550W (3/4 hp)  Motor brake Built-in  Battery 2 rechargeable gel batteries (12 V)  Battery charger Built-in (24 V)  Winch (24 V) 4 500 lb (2 000 kg)  Winch cable Synthetic cable or galvanized steel 1/4" (stainless steel in option)  Mast Cel-filled  Tiltable telescopic boom 6 positions  Safety arms 2 included  Width 21" (53.3 cm)	
Motor brake — Built-in  Battery — 2 rechargeable gel batteries (12 V)  Battery charger — Built-in (24 V)  Winch (24 V) — 4 500 lb (2 000 kg)  Winch cable — Synthetic cable or galvanized steel 1/4" (stainless steel in option)  Mast — Lock/unlock 180° pivotal mast included  Flat-proof tires — Gel-filled  Tiltable telescopic boom — 6 positions  Safety arms — 2 included	
Battery — 2 rechargeable gel batteries (12 V)  Battery charger — Built-in (24 V)  Winch (24 V) — 4 500 lb (2 000 kg)  Winch cable — Synthetic cable or galvanized steel 1/4" (stainless steel in option)  Mast — Lock/unlock 180° pivotal mast included  Flat-proof tires — Gel-filled  Tiltable telescopic boom — 6 positions  Safety arms — 2 included	
Battery charger — Built-in (24 V)  Winch (24 V) — 4 500 lb (2 000 kg)  Winch cable — Synthetic cable or galvanized steel 1/4" (stainless steel in option)  Mast — Lock/unlock 180° pivotal mast included  Flat-proof tires — Gel-filled  Tiltable telescopic boom — 6 positions  Safety arms — 2 included	
Winch (24 V) 4 500 lb (2 000 kg)  Winch cable Synthetic cable or galvanized steel 1/4" (stainless steel in option)  Mast Lock/unlock 180° pivotal mast included  Flat-proof tires Gel-filled  Tiltable telescopic boom 6 positions  Safety arms 2 included	
Winch cable ————————————————————————————————————	
(stainless steel in option)  Mast — Lock/unlock 180° pivotal mast included  Flat-proof tires — Gel-filled  Tiltable telescopic boom — 6 positions  Safety arms — 2 included	
Flat-proof tires — Gel-filled Tiltable telescopic boom — 6 positions Safety arms — 2 included	
Tiltable telescopic boom — 6 positions  Safety arms — 2 included	
Safety arms — 2 included	
Width	
Width 21 (35.5 GH)	
Length (without footboard) ————————————————————————————————————	
Height (minimum) ———————————————————————————————————	
Height (maximum) ———————————————————————————————————	
Weight — 730 lbs (331 kg)	
Forward and reverse speed ———————————————————————————————————	
MODEL-SPECIFIC  MODEL 200S  MODEL 200S  Corner maneuverability — Turns 35" (89 cm) x 24" (61 cm) — Turns 24" (61 cm) x 24" (61 cm)	m)

